


CASE FINISH	CURRENT (AMPS)	WORKING VOLTAGE				MAXIMUM DC RESISTANCE (OHMS)	MAXIMUM VOLTAGE DROP		MINIMUM CAPACITANCE (uF)	MIN. INSERTION LOSS PER MIL-STD-220, FULL LOAD, +25°C												
		-55°C TO +85°C		-55°C TO +125°C			DC	AC		14 KHz	30 KHz	50 KHz	75 KHz	100 KHz	150 KHz	300 KHz	500 KHz	1 MHz	10 MHz	100 MHz	1 GHz	10 GHz
		AC	DC	AC	DC																	
SOLDER	15	125(400Hz)	250	125(400Hz)	200	0.006	0.100	.15	.25/.625	-	9	-	-	15	19	25	-	36	60	--	70	-

PART MARKING:

M15733/27-0014
 C OLSP2 DATE CODE
 125VAC 400Hz
 200VDC 15A 125°C
 51-322-009

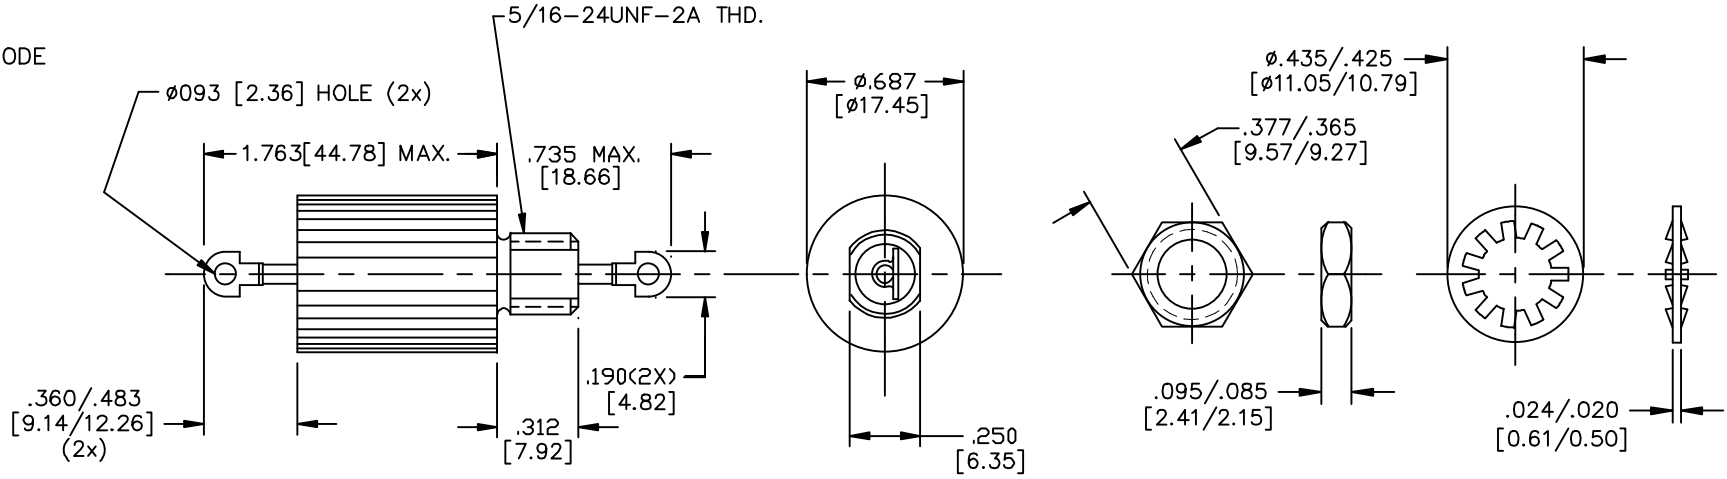

SCHEMATIC



MTG. HARDWARE

THIS PART IS CODED "NCA". SPECTRUM CONTROL, INC. DOES NOT HAVE CHANGE AUTHORITY. CUSTOMER APPROVAL REQUIRED BEFORE PRODUCT/PROCESS CHANGES CAN BE MADE.

NOTES:

- 1) MOUNTING TORQUE NOT TO EXCEED 7in-lbs.

											CN. 59045-ENG	37	36	REV. N.D.	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES [MILLIMETERS] DO NOT SCALE THIRD ANGLE PROJECTION	TOLERANCES UNLESS OTHERWISE SPECIFIED Fractions ± Dec. .xx± Dec. .xxx±.010 Angles ±0° 30'	SPECTRUM CONTROL INC.	FAIRVIEW PENNSYLVANIA			
											CN. 176880	CHANGE NOTICE	Dwn. KAUFFMAN Ckd. 11-8-96	Description Low Pass EMI Filter							
																	CODE IDENT. NO. OLSP2	Sheet 1 of 1	51-322-009		