



.156±.005 HEX


NOTES:  
1. HARDWARE IS INCLUDED.

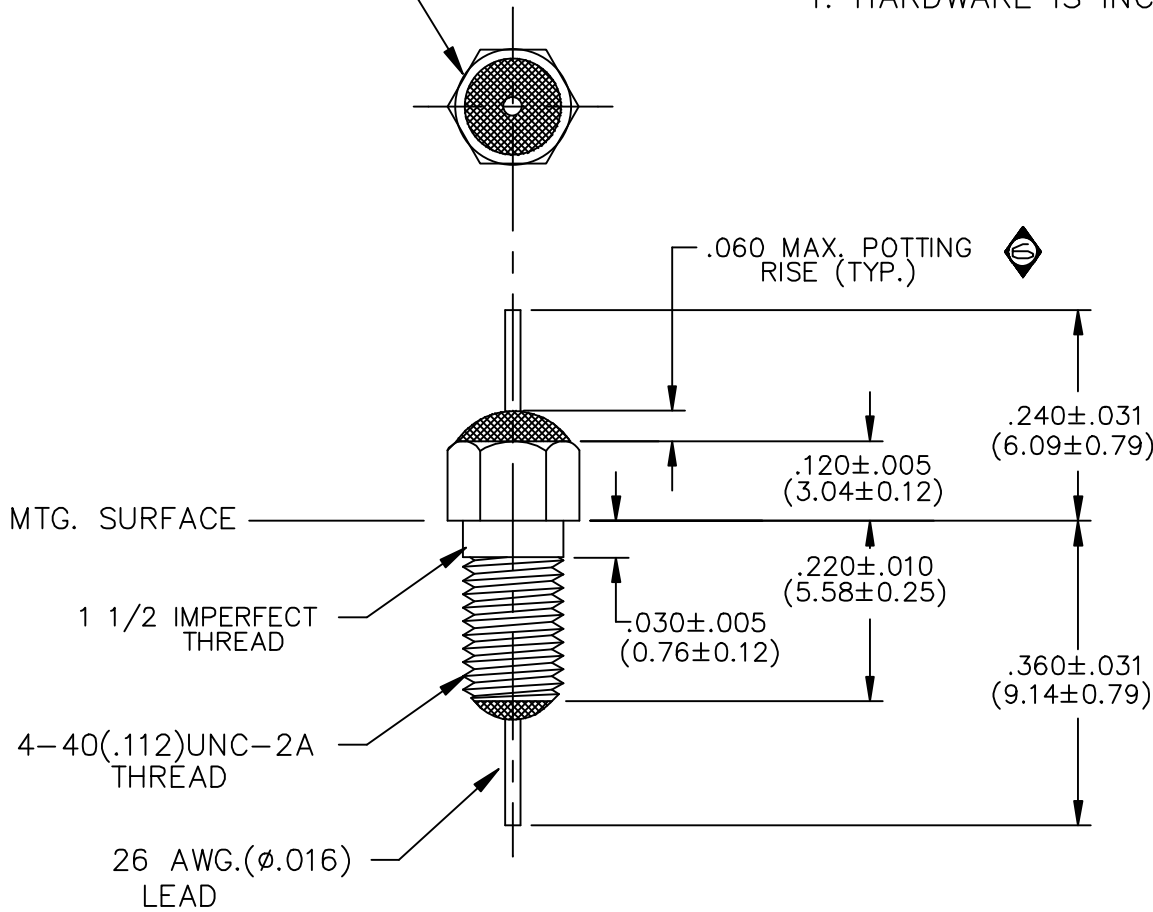

LEAD FINISH:	SOLDER
BUSHING FINISH:	SILVER
CAPACITANCE	27nF GMV
TEMP. RANGE	-55°C TO 125°C
CURRENT	5 AMP MAX.
WORKING VOLTAGE	125°C 100VDC MAX.
D.C. RESISTANCE	.03ohms MAX.
MIN. I.L. PER MIL-STD-220 AT 25°C NO LOAD	
FREQ. MHz	1    10    100    1GHz    10GHz
I.L. (db)	10    30    50    70    70



MARKING:  
PART: SCI002  
BAG: SCI-3112-002  
DATE CODE  
LOT NO.  
QTY./BAG (200 MAX.)

	06	05	04	REV. NO.	TOLERANCES UNLESS OTHERWISE SPECIFIED	 SPECTRUM CONTROL INC.	ERIE, FAIRVIEW PENNSYLVANIA
	CN 214618	CN 202420	CN 169175 REDRAWN	CHANGE NOTICE	Fractions ± 1/64 Dec. .xx± Dec. .xxx±.010 Angles ±0° 30'		Dwn. M.KEVERLINE Date 2-17-04
					CODE IDENT. NO. QLSP2	Engr. T. Taylor Scale NONE	SCI-3112-002