


KEMET Part Number: PHE820MB5220MR17
(F720BD223M275A)

Film, Metallized Polyester, Safety, PHE820M/F720, 0.022 uF, 20%, 760 V, 275 V, 100C, Lead Spacing = 15mm

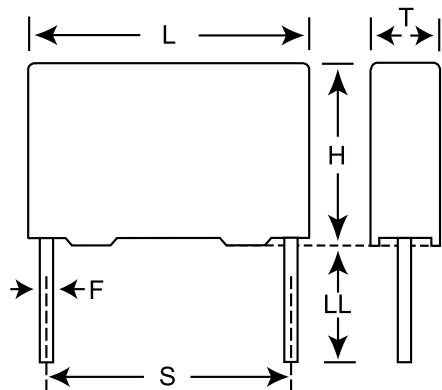

General Information	
Dielectric:	Metallized Polyester
Style:	Radial
Series:	PHE820M/F720
Features:	Pulse
RoHS:	Yes
Lead:	Wire Leads
Approvals:	ENEC, UL, cUL
Miscellaneous:	Not For New Design, Please Check Possible Alternative Parts (AltPart). SRF= 9 MHz

Dimensions	
L	18mm MAX
H	10.5mm MAX
T	5.5mm MAX
S	15mm +/-0.4mm
LL	17mm -1mm
F	0.8mm NOM
G	0.5mm NOM

Specifications	
Capacitance:	0.022 uF
Capacitance Tolerance:	20%
Voltage DC:	760 VDC
Voltage AC:	275 VAC
Temperature Range:	-40/+100C
Rated Temperature:	100C
Dissipation Factor:	1% 1kHz
Insulation Resistance:	30 GOhms
Max dVdt:	100 V
Safety Class:	X2

Packaging Specifications	
Packaging:	Bulk
Packaging Quantity:	800